

Truck Locks


Simple Truck Locks, with Support Pad

Materiál: Oceľ, pozinkovaná.

Support pad: rubber.

Enables a mobile device to be fixed and relieved in a fixed position. It is typically mounted on the underside either next to a castor or evenly between two castors.

Teplotný rozsah: -20°C do +75°C.

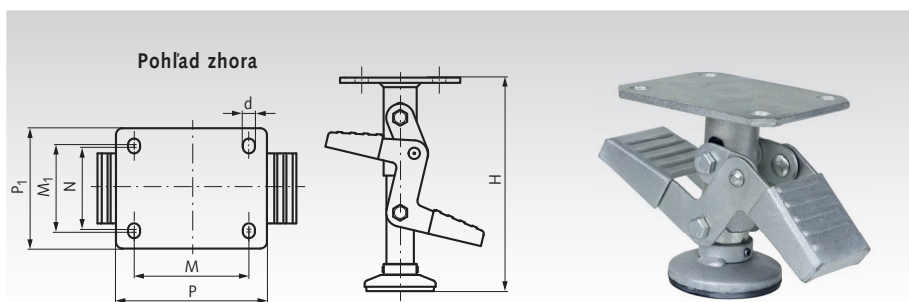

Informácie potrebné na objednanie: napr.: Produkt č. 77787100, Truck lock with support pad, for castor-Ø 100mm


Produkt č.	H _{min.} mm	H _{max.} mm	pre Koliesko-Ø mm	d mm	P mm	P ₁ mm	M mm	M ₁ mm	N mm	Hmotnosť kg
777 871 00	118	146	100	11	138	110	105	80	75	1,7
777 871 25	136	169	125	11	138	110	105	80	75	1,9
777 871 50	155	195	150	11	138	110	105	80	75	2,1
777 872 00	210	250	200	11	138	110	105	80	75	2,3

Truck Locks, with Spring Damper and Support Pad

Materiál: Oceľ, pozinkovaná. Body painted green. Support pad: rubber.

Enables a mobile device to be fixed and relieved in a fixed position. It is typically mounted on the underside either next to a castor or evenly between two castors. With one-step pedal for easy locking and unlocking and integrated spring damper.

Teplotný rozsah: -20°C do +70°C.

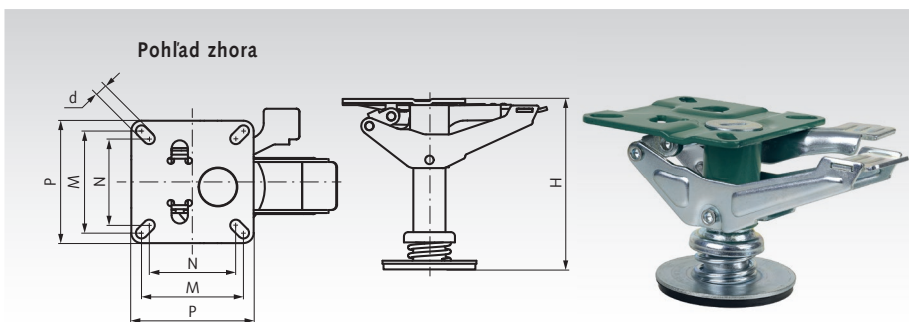

Informácie potrebné na objednanie: napr.: Produkt č. 77788100, Truck Lock with pad and spring damper, for castor-Ø 100mm


Produkt č.	H _{min.} mm	H _{max.} mm	pre Koliesko-Ø mm	d mm	P mm	M mm	N mm	Hmotnosť kg
777 881 00	112	152	100	11	120	100	85	1,5
777 881 50	167	207	150	11	120	100	85	1,6

Precision Truck Locks, with Spring Damper and Support Pad

Materiál: Oceľ, pozinkovaná, pasivovaný na modro. Support pad: rubber.

Enables a mobile device to be fixed and relieved in a fixed position. It is typically mounted on the underside either next to a castor or evenly between two castors. When the Truck Lock is pressed, it retracts approx. 10 mm. Contact pressure approx. 60 kg.

Teplotný rozsah: -20°C do +70°C.

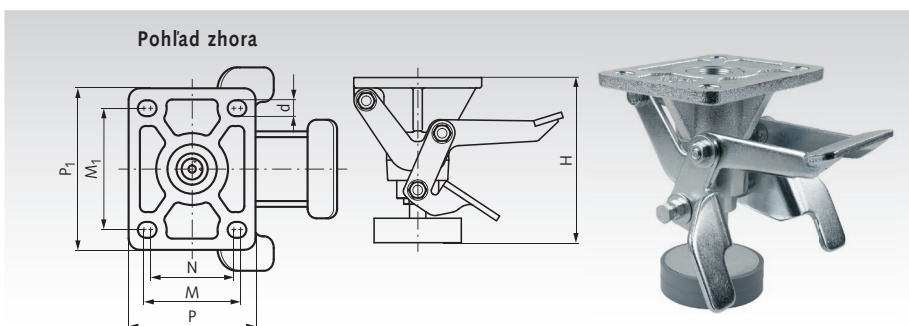

Informácie potrebné na objednanie: napr.: Produkt č. 77789125, Precision truck lock with support pad and spring damper, for castor-Ø 125mm

Produkt č.	H _{min.} mm	H _{max.} mm	pre Koliesko-Ø mm	d mm	P mm	P ₁ mm	M mm	M ₁ mm	N mm	Hmotnosť kg
777 891 25	142	180	125	12,3	110	140	80	105	75	3,6
777 891 50	170	208	150	12,3	110	140	80	105	75	3,6
777 891 60	175	213	160	12,3	110	140	80	105	75	3,6
777 892 00	217	255	200	12,3	110	140	80	105	75	3,6

Poznámka: Height differences between the castors and truck locks can be compensated for by adjusting the frame or using adapter plates. Truck Locks are not designed to bear loads, but to reduce the load on the transport device by activating the lever without lifting it. Therefore, we do not specify a load capacity.