

Lifting Castors with Operating Lever

Zdvíhacie kolieska s platničkou, with Swivel Operating Lever, Plastic Tread

Materiál:

Vidlica: ocelový plech, pozinkovaná, chromatovaná.

Behúň: plastic, white.

Teleso kolesa: plastic, screwed.

Montáž kolesa: guľôčkové ložisko.


Otočné ložisko: dvojité guľový veniec.

Truck lock: steel. Support pad: rubber.

Mountable, castor-based machine foot with brake for easy repositioning of machines and production units indoors.

Teplotný rozsah: -30°C do +80°C.

Reduced load capacity at over +35°C.

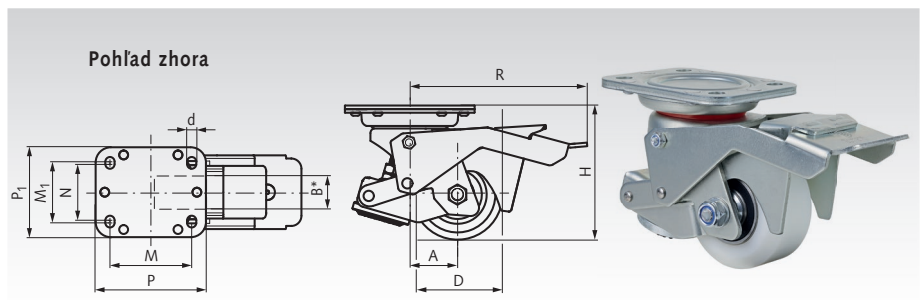

Informácie potrebné na objednanie: napr.: Produkt č. 77783075, Lifting castor with swiveling operating lever, plastic, Ø 75mm

Produkt č.	D mm	B mm	H mm	H _{max.} mm	A mm	R mm	d mm	P mm	P ₁ mm	M mm	M ₁ mm	N mm	Nosnosť kg	Hmotnosť kg
777 830 75	75	40	112	125	43	150	9	108	88	80	60	55	350	2,2
777 830 80	80	40	115	128	45	150	9	108	88	80	60	55	400	2,2

Zdvíhacie kolieska s platničkou, with Swivel Operating Lever, Polyurethane Tread

Materiál:

Vidlica: ocelový plech, zinc-plated, chromatovaná.

Behúň: polyurethane, black.

Teleso kolesa: steel, screwed.


Montáž kolesa: guľôčkové ložisko.

Otočné ložisko: dvojité guľový veniec.

Truck lock: steel. Support pad: rubber.

Mountable, castor-based machine foot with brake for easy repositioning of machines and production units indoors.

Teplotný rozsah: -20°C do +80°C.

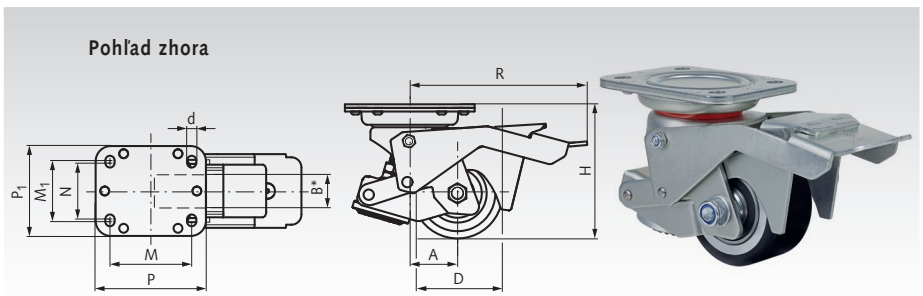

Informácie potrebné na objednanie: napr.: Produkt č. 77784075, Lifting castor with swiveling operating lever, polyurethane, Ø 75mm

Produkt č.	D mm	B mm	H mm	H _{max.} mm	A mm	R mm	d mm	P mm	P ₁ mm	M mm	M ₁ mm	N mm	Nosnosť kg	Hmotnosť kg
777 840 75	75	40	112	125	43	150	9	108	88	80	60	55	350	2,3
777 840 80	80	40	115	128	45	150	9	108	88	80	60	55	400	2,3

Poznámka

The lifting castor is equipped with a swiveling operating lever that works in conjunction with the swivel movement of the castor. The foot lever allows the foot to be extended, lifting the castor off the ground.

When the lever is released, the foot rises and the castor returns to its active position. The lever can be folded under the device to reduce the risk of tripping.

When not in use, a high ground clearance is maintained. Suitable for applications with frequent changes between stable and mobile use.

Height adjustment while stationary or during operation is not possible. The static load capacity of the truck lock per lifting castor is 1000 kg.

* Šírka kolesa